




naturen[®]
trinomad




EMBALLAGES
naturen





TO VIEW THE INSTALLATION VIDEO, PLEASE VISIT OUR WEBSITE AT THE FOLLOWING ADDRESS :
www.naturen.pro/en/our-solutions/trinomad-2-seconds/






1 DEPLOYMENT



2 INSTALLATION





3 OPENING

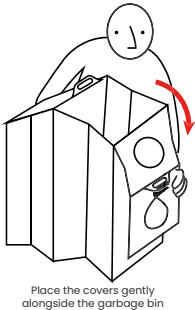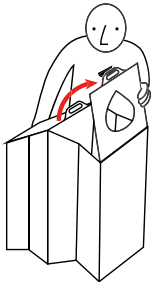

4 INSTALLATION OF BALLAST BAG AND SAFETY KEY






Insert the safety key into the slot and turn a quarter turn. The garbage bin will no longer fold.

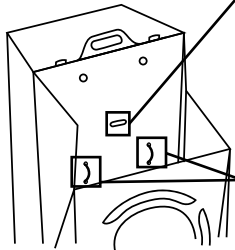

Attach ballast bags with carabiners

5 CLOSE


Take the covers and bring them to the top.

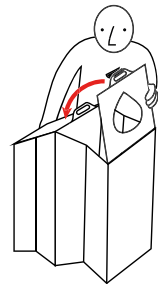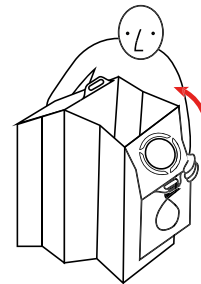


6

INSERT THE WASTE BAG


Lift cover

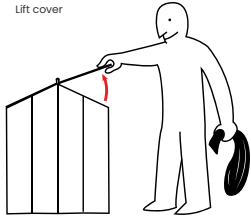

Insert waste bag through opening





Fold bag edges into slots



Close cover


8

REMOVE OF BALLAST BAG AND SAFETY KEY

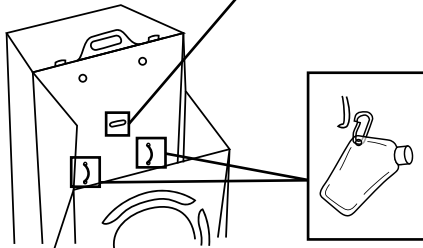Open the covers to free up the interior space : **see action 3**Then reinstall the covers : **see action 5**

7

REMOVE WASTE BAG




Open the cover



Remove the edges of the waste bag from the slots




Bring bag edges to center of opening

Release the compartment(s) by unscrewing the handles : **see action 3**Once this has been done, reinstall the cover(s) : **see action 5**


Remove the garbage bag

9

FOLDING THE GARBAGE BIN

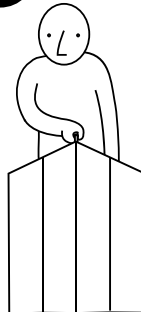


Grab the handle

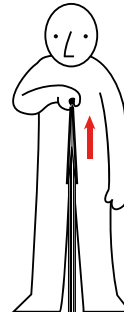

Push up to fold the garbage bin

10

GARBAGE BIN STORAGE

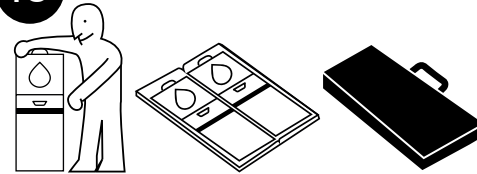

Attach the scratch to each garbage bin before placing in the transport bags.

NORMAL USE, AS RECOMMENDED IN THE INSTRUCTIONS, ENSURES MAXIMUM DURABILITY.**IMPORTANT**

DO NOT STORE OR STOCK THE GARBAGE BIN VERTICALLY ON THE HANDLE SIDE.

DO NOT DEPLOY THE GARBAGE BIN OTHER THAN BY THE TWO HANDLES AND OFF THE GROUND (SEE PROCEDURE 2).

ONCE ASSEMBLED, DO NOT MOVE THE GARBAGE BIN OTHER THAN BY LIFTING IT BY THE TWO HANDLES ON THE SIDES.

DO NOT DROP THE GARBAGE BIN ON THE GROUND, INSTALL GENTLY ONCE ITS UNFOLDED AND ABOVE THE GROUND.

IT IS ESSENTIAL TO KEEP THE MAIN COMPARTMENTS FREE FOR THE INSTALLATION OF BALLAST BAGS, SAFETY KEYS AND ALSO FOR EMPTYING THE WASTE BAG ONCE IT HAS BEEN FILLED (SEE PROCEDURE 3).

REMOVE THE SAFETY KEY AND BALLAST BAGS BEFORE FOLDING THE DEVICE.

DON'T LEAN ON THE GARBAGE BIN, DON'T PUT YOUR HANDS IN THE MAIN HOLE WHEN THERE'S NO BAG.

GARBAGE BAGS MUST BE ADAPTED TO THE SIZE OF THE COMPARTMENTS: 110 LITERS, HEIGHT: 110CM MINIMUM, BAG DIAMETER: 44CM MINIMUM. ANY OTHER BAG OF SMALLER SIZE MAY DAMAGE THE CLAMPING COVER.

DO NOT HANDLE THE GARBAGE BIN IN ANY WAY OTHER THAN THAT SPECIFIED IN THE OPERATING INSTRUCTIONS. ANY OTHER USE OF THE GARBAGE BIN GOES BEYOND NORMAL USE AND MAY DAMAGE THE DEVICE.

NATUREN47 CHEMIN DU VIEUX CHÊNE
38240 MEYLAN FRANCEWWW.NATUREN.PRO
CONTACT@NATUREN-CONCEPT.COM
+33 (0)4 76 42 07 81